


• MAIN UNIT



• ACCESSORIES

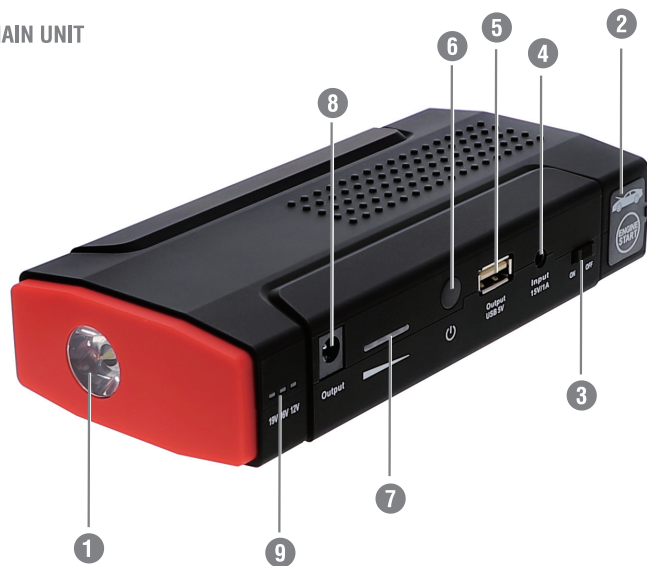

# 4smarts

For more information about products and warranty  
visit [www.4smarts.com](http://www.4smarts.com)



4smarts GmbH  
Postfach 102306  
86013 Augsburg, Germany  
WEEE-Nr.: DE 14120388



web: [www.4smarts.com/contact](http://www.4smarts.com/contact)  
mail: [info@4smarts.com](mailto:info@4smarts.com)



All listed brands are trademarks of the corresponding companies.  
Errors and omissions excepted, and subject to technical changes.  
Our general terms of delivery and payment are applied.

verM023-01



[facebook.4smarts.com](https://facebook.com/4smarts.com)



[instagram.4smarts.com](https://instagram.com/4smarts.com)



[twitter.4smarts.com](https://twitter.com/4smarts.com)



[youtube.4smarts.com](https://youtube.com/4smarts.com)

# 4smarts

## Jump Starter Power Bank

IGNITION 13800 mAh



Thank you



for choosing a quality product from 4smarts

## I. Safety instructions

- Do not open the device. Stop using the device if it becomes damaged.
- The device should only be repaired by a specialist.
- Only use a soft, dry cloth to clean the device.
- The product is intended for private, non-commercial use only.
- Do not drop the product and do not expose it to any major shocks.
- Do not operate the product outside the power limits given in the specifications.
- Do not modify the product in any way. Doing so voids the warranty.
- This product is no toy, and should not be given to children.

### WARNING!

Do not touch the red and black clamps together or connect both to the same piece of metal to prevent physical injury or damage to the vehicle. Do not use the jumper cable for any other purpose than starting a vehicle.  
KEEP AWAY FROM CHILDREN AT ALL TIMES!

## II. Specifications

- Battery Life Cycles: > 500
- Input: AC 15V/1A
- Output: DC 5V/2A; DC 12V/2A; DC 16V/2A; DC 19V/3.5A
- Jump start current: 200-400A
- LED output: 1W
- Operating temperature: -30°C ~ +80°C
- Storage temperature: 0°C ~ +60°C
- Dimensions: 165x79x40mm
- Weight: 429g

## III. Picture description

### MAIN UNIT:

1. LED light SOS
2. Jump starter socket
3. Masterswitch
4. Input 15V/1A
5. USB output 5V/2A
6. On/Off button
7. Remaining power indicator
8. Output DC12V/2A DC16V/2A DC19V/3.5A
9. 12V 16V 19V Indicator light

### ACCESSORIES:

10. Heavy duty jump start cable
11. DC adapter Charger
12. AC to DC Adapter Charger
13. USB Type-C, Micro USB, Lightning
14. Notebook cable and DC head

\*Actual products and accessories may slightly vary from the pictures shown above.

## IV. Operation

Press the power button lightly to check the remaining battery capacity.


| Control lights | 0 LED | 1 LED | 2 LED | 3 LED | 4 LED |
|----------------|-------|-------|-------|-------|-------|
| Charge level   | 0%    | 25%   | 50%   | 75%   | 100%  |

While the jump starter is being charged, the indicator lights will flash one by one until its maximum charge level is reached. All four indicator lights will be on permanently when the battery is fully charged.

### How to jump start a vehicle battery in the twinkling of an eye:

1. Make sure that the battery capacity of the jump start device is above 25% (at least one indicator light must be on).
2. Connect the jump lead to the vehicle's discharged battery.
3. First connect the red terminal to the positive pole (+) and then the black cable to the ground connection/ground point or a free metallic point on the motor block.
4. Connect the jump lead to the correct socket on the jump device.
5. Now attempt to crank the engine. If the engine does not start, wait at least 10 seconds before trying to restart the engine.
6. Disconnect the jump lead from the jump device within 10 seconds after the engine has been successfully started.

### Recommended vehicle engine displacement for jump starting:

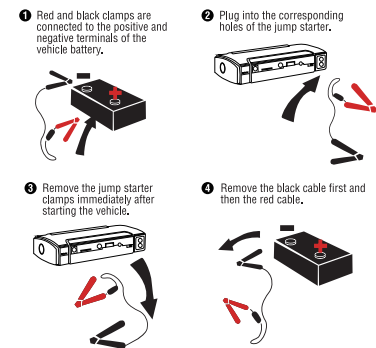

### How to turn on the LED light:

Press and hold the Power button for 3 seconds and turn on the LED light. As soon as the LED lamp is turned on, double pressing the power button will cycle through additional modes (solid light - strobe light - SOS flashing - off).

### Charging mobile electronic devices:

The jump starter has one 5V USB port and includes one USB adapter with multiple types of charging adapter plugs for various electronic devices.

### How to charge an electronic device:

1. Make sure that the electronic device is 5V powered.
2. Connect the USB adapter cable to one of the USB ports on the jump start device.
3. Attach the compatible charger adapter plug to the supplied USB adapter cable and connect it to the electronic device.
4. Press the Power button to start charging the electronic device.

### How to charge the jump starter device:

Use only the supplied AC or DC adapter to charge the jump starter.

### WARNING!

All other chargers may cause possible damage and/or reduce the service life of the jump starter.

## V. Warranty

The 4smarts GmbH assumes no liability and provides no warranty for damage resulting from improper installation or mounting, improper use of the product or from failure to observe the operating instructions and/or safety notes.

## VI. Disposal notification

Dispose of packaging material immediately according to locally applicable regulations. Electric and electronic devices as well as batteries must not be disposed of with household waste. Consumers are obliged by law to return electric and electronic devices as well as batteries at the end of their service lives to the public collecting points set up for this purpose or point of sale.

## VII. Attestation of conformity

Hereby, 4smarts GmbH, declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The declaration of conformity may be consulted at [www.4smarts.com](http://www.4smarts.com).

## I. Sicherheitshinweise

- Öffne das Gerät nicht und betriebe es bei Beschädigungen nicht weiter.
- Lass das Gerät nur von Fachleuten reparieren.
- Verwende zur Reinigung nur trockene, weiche Tücher.
- Das Produkt ist für den privaten, nicht-gewerblichen Haushaltsgebrauch vorgesehen.
- Lass das Produkt nicht fallen und setze es keinen heftigen Erschütterungen aus.
- Betreibe das Gerät nicht außerhalb seiner in den technischen Daten angegebenen Leistungsgrenzen.
- Nimm keine Veränderungen am Gerät vor. Dadurch verlierst du jegliche Gewährleistungsansprüche.
- Dieses Produkt ist kein Spielzeug, gib es daher nicht in Kinderhände.

### WARNING!

Um Verletzungen und Schäden am Fahrzeug zu vermeiden, berühre nicht Klemmen oder verbinde sie mit demselben Pol. Verwende das Starthilfekabel nicht für andere Zwecke als zum Starten eines Fahrzeugs.  
STETS VON KINDERN FERNHALTEN!

## II. Technische Daten:

- Batterie-Lebenszyklen: > 500
- Input: AC 15V/1A
- Output: DC 5V/2A; DC 12V/2A; DC 16V/2A; DC 19V/3.5A
- Starthilfe-Strom: 200-400A
- LED-Leistung: 1W
- Betriebstemperatur: -30°C ~ +80°C ~ +80°C
- Aufbewahrungstemperatur: 0°C ~ +60°C ~ +60°C
- Abmessungen: 165x79 x40mm
- Gewicht: 429g

## III. Produktbeschreibung

### POWERBANK:

1. LED-Leuchte SOS
2. Starterbuchse für Starthilfe
3. Hauptschalter
4. Eingang 15V/1A
5. USB-Ausgang 5V/2A
6. Ein/Aus-Taste
7. Reststromanzeige
8. Ausgang DC12V/2A DC16V/2A DC19V/3.5A
9. 12V 16V 19V Kontrollleuchte

### ZUBEHÖR:

10. Hochleistungs-Überbrückungskabel
  11. DC Adapterkabel
  12. AC zu DC Adapter Ladegerät
  13. USB Typ-C, Micro USB, Lightning
  14. Notebook-Kabel und Gleichstromadapter
- \*Die tatsächlichen Produkte und Zubehörteile können von den oben gezeigten Bildern leicht abweichen.

## IV. Bedienung

Drücke den Netzschalter nur leicht, um die verbleibende Akkukapazität zu überprüfen.


| Kontrollleuchten | 0 LED | 1 LED | 2 LED | 3 LED | 4 LED |
|------------------|-------|-------|-------|-------|-------|
| Ladestand        | 0%    | 25%   | 50%   | 75%   | 100%  |

Während des Aufladens des Starthilfegeräts blinken die Kontrollleuchten nacheinander auf, bis der maximale Ladezustand erreicht ist. Ist der Akku vollständig geladen, leuchten alle 4 Kontrolllampen dauerhaft.

### So überbrückst du eine Fahrzeugbatterie im Handumdrehen:

1. Vergewissere dich, dass die Batteriekapazität des Starthilfegeräts über 25% liegt (mindestens eine Kontrollleuchte muss aufleuchten)
2. Verbinde das Starthilfekabel mit der entladenen Batterie des Fahrzeugs.
3. Verbinde zuerst die rote Klemme mit dem Pluspol (+) und anschließend das schwarze Kabel mit dem Masseanschluss/Massepunkt oder einer freien metallischen Stelle am Motorblock.
4. Schließe das Starthilfekabel an die richtige Buchse des Starthilfegeräts an.
5. Versuche nun, den Motor zu starten.
6. Wenn der Motor nicht startet, warte mindestens 10 Sekunden, bevor du versuchst, den Motor erneut zu starten.
6. Trenne das Starthilfekabel innerhalb von 10 Sekunden nach erfolgreichem Motorstart vom Starthilfegerät.

### Empfohlene Fahrzeugmotormontage für den Starthilfe-Modus:

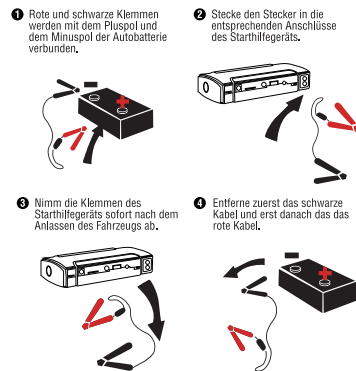

### So schaltest du die LED-Beleuchtung ein:

Halte den Ein-/Aus-Schalter 3 Sekunden lang gedrückt und schalte das LED-Licht ein. Sobald die LED Lampe leuchtet, wird durch wiederholtes Betätigen des Netzschalters in weitere Funktionen gewechselt (Dauerlicht - Blinklicht - SOS Blinklicht – aus).

### Laden von mobilen elektronischen Geräten

Das Starthilfegerät verfügt über einen 5V-USB-Anschluss und beinhaltet einen USB-Adapter mit mehreren Arten von Ladesteckern für verschiedene elektronische Geräte.

### Wie du ein elektronisches Gerät aufladst:

Stelle sicher, dass das elektronische Gerät mit 5V betrieben wird. Schließe das USB-Adapterkabel an einen der USB-Anschlüsse am Starthilfegerät an.

Verbinde den kompatiblen Ladeadapterstecker mit dem mitgelieferten USB-Adapterkabel und schließe ihn an das elektronische Gerät an. Drücke den Ein-/Aus-Schalter, um mit dem Aufladen des elektronischen Geräts zu beginnen. Beide USB-Ports akzeptieren auch Standard-USB-Kabel, die im Lieferumfang deines elektronischen Geräts enthalten

### So lädst du das Starthilfegerät auf:

Verwende zum Laden des Starthilfegeräts nur den mitgelieferten AC- oder DC-Adapter. WARNUNG! Alle anderen Ladegeräte verursachen mögliche Schäden und/oder verkürzen die Lebensdauer des Starthilfegeräts.

## V. Gewährleistung

Die 4smarts übernimmt keinerlei Haftung oder Gewährleistung für Schäden, die aus unsachgemäßem Installation, Montage und unsachgemäßem Gebrauch des Produktes oder einer Nichtbeachtung der Bedienungsanleitung und/oder der Sicherheitshinweise resultieren.

## VI. Hinweis zum Umweltschutz

Entsorge das Verpackungsmaterial sofort gemäß den örtlich gültigen Entsorgungsvorschriften. Elektrische und elektronische Geräte sowie Batterien dürfen nicht mit dem Hausmüll entsorgt werden. Der Verbraucher ist gesetzlich verpflichtet, elektrische und elektronische Geräte sowie Batterien am Ende ihrer Lebensdauer an den dafür eingerichteten, öffentlichen Sammelstellen oder an die Verkaufsstelle zurückzugeben.

## VII. Konformitätshinweis

Hiermit erklärt die 4smarts GmbH, dass sich dieses Produkt in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 2014/53/EU befindet. Die Konformitätserklärung nach der RED Richtlinie findest du unter [www.4smarts.com](http://www.4smarts.com).