

4smarts

Qi2 CHARGING STATION

TRIDENT



Thank You 

for choosing a quality product from 4smarts

1 Safety Instructions

1.1 General precautions

- Do not drop the product or subject it to heavy shocks.
- Have the product repaired by a qualified technician only.

1.2 Precautions for electrical products

- Protect the device from dirt, moisture, overheating, extreme temperatures.
- Do not open the device and do not continue to operate it if damaged.
- Never use force when plugging in the device or when using adapters.
- Do not operate the device outside its performance limits specified in the technical data.

1.3 Warning-magnets

- People with pacemakers should keep away from the magnets. The magnets can negatively affect the function of the pacemaker.
- Do not place any bank or similar cards with magnetic strips or magnetically sensitive objects on the product. The data on the cards could be damaged or completely deleted.

2 Technical Data

IN USB-C: AC 12V/2.5A (30W max.)

OUT USB-C1/C2: DC 5V/1A (5W max.)

OUT Wireless Phone: 5W/7.5W/10W/15W

OUT Wireless TWS: 5W

Frequency Range: 105-360 kHz

Material: PC+Aluminium alloy

Supports: Apple StandBy Function, MagSafe

Protocols: Magnetic Power Profile (MPP), Extended Power Profile (EPP), Baseline Power Profile (BPP), Samsung Proprietary Power Delivery Extension (PPDE)


Foldable compact design

Integrated overheating protection

Optimised 30W power supply with 1.5m USB-C cable included

UltiMag ring included for non-MagSafe / Qi2 devices

Please note: For the upright charging function, the smartphone must be Qi2 or MagSafe-enabled (check the device's manufacturer page for information) or use our UltiMag Ring to use this function.

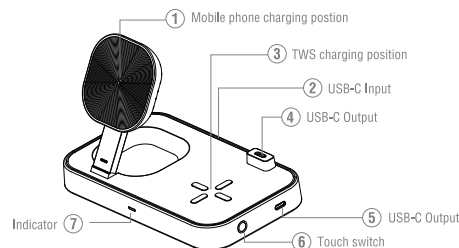

EN



Included in the scope of delivery
8.Trident
9.30W Charger
10.1.5M USB-C cable
11.UltiMag Ring
12.MFi Fast Charger

Included in the set: If you have purchased the [Trident] in a complete set, the [additional MFi Apple Watch Fast Charger] is already included in your packaging. Follow the instructions in section [4] to connect it.

As an optional accessory: If you did not receive the [additional MFi Apple Watch Fast Charger] in the set, you can purchase it separately as an optional accessory. After purchase, follow the same instructions in section [4] to use it.

3 Getting Started

- Connect the USB-C cable supplied with the 30-watt charger to the USB-C input (marked 2) on a 100-240V power source. After connecting, the blue LED lights up and goes out automatically after 15 seconds. To keep the LED lit for longer, double-click on the LED switch. When the indicator goes out, check the connection and renew it if necessary.
- Place your device with integrated wireless charging function in the correct position on the charger. The indicator (marked 7) lights up green as soon as charging starts. You can switch the LED indicator on or off manually by clicking on the touch switch (marked 6).

LED function indicator

	LED charging area
Power supply	Brief illumination blue
Standby	Off
Charging process	Lights up green
End of charging	Lights up green
Error message	Flashes red

4 Function Notes

How to use your wireless charging station?

Charging your wireless smartphone

- Place your compatible smartphone on Charging Area (marked as 1).
- The device will automatically dock thanks to the integrated magnetic rings.
- Once docked, the LED function indicator (marked 7) for Charging Area will light up in blue, indicating that the charging process has started.

Charging your TWS headset

- Place your TWS headset on Charging Area (marked as 3).
- The LED function indicator (marked 7) for Charging Area will illuminate in blue, signaling that the charging is underway.

Charging your smartwatch

- Connect your smartwatch charger to one of the two USB-C ports available. (marked as 4 or 5)
 - Place your smartwatch on the designated holder.
- Note:** The charging areas operate independently, allowing you to charge your devices as needed.

EN

5 Troubleshooting

5.1 My device does not charge via Wireless charge

- Check if the smartphone you are using is compatible for fast wireless charging. If possible, also test it with another wireless charger.
- If necessary, remove the protection cover or metal sticker from the back of your device.
- Check to see if another device that supports wireless charging is not charging. This will help determine if there is a defect or compatibility problem.

5.2 Charging is too slow

To ensure successful charging, please ensure that the distance between the wireless charger and the charging device is less than or equal to 5mm. If the LED light is red, please check for foreign objects and remove them.

6 Care and Maintenance

Only use a soft, dry cloth to clean the device.

7 Warranty

The 4smarts GmbH assumes no liability and provides no warranty for damage resulting from improper use of the product or from failure to observe the operating instructions and/or safety notes.

8 Disposal Notification



Electric and electronic devices as well as batteries must not be disposed of with household waste. Consumers are obliged by law to return electric and electronic devices as well as batteries at the end of their service lives to public collecting points set up for this purpose or point of sale.

9 Service and Support

If the product is defective or in case of problems during installation, please consult your dealer or the 4smarts product consulting via: <https://www.4smarts.com/contact>

Service Hotline

Monday - Friday: 9 - 17h

+ 49 (0)821 20708444

E-Mail: customer-service@4smarts.com

10 Attestation of Conformity

Hereby, 4smarts GmbH, declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The declaration of conformity may be consulted at www.4smarts.com.

EN

1 Sicherheitshinweise

1.1 Generelle Vorsichtsmaßnahmen

- Lass das Produkt nicht fallen und setze es keinen heftigen Erschütterungen aus.
- Lass das Gerät nur von Fachleuten reparieren.

1.2 Vorsichtsmaßnahmen für elektronische Produkte

- Schütze das Gerät vor Schmutz, Feuchtigkeit, Überhitzung, extremen Temperaturen.
- Öffne das Gerät nicht und betreibe es bei Beschädigungen nicht weiter.
- Wende beim Einstecken des Gerätes und bei evtl. eingesetzten Adaptern niemals Gewalt an.
- Betreibe das Gerät nicht außerhalb seiner in den technischen Daten angegebenen Leistungsgrenzen.

1.3 Warnung – Magnete



Personen mit Herzschrittmachern sollten sich von den Magneten fernhalten. Die Magnete können die Funktion des Herzschrittmachers negativ beeinflussen. Lege keine Bankkarten oder ähnliche Karten mit Magnetstreifen oder magnetisch empfindliche Gegenstände auf die Produkte. Die Daten auf den Karten könnten beschädigt oder vollständig gelöscht werden.

2 Technische Daten

IN USB-C: AC 12V/2.5A (30W max.)

OUT USB-C1/C2: DC 5V/1A (5W max.)

OUT Wireless Smartphone: 5W/7.5W/10W/15W

OUT Wireless TWS: 5W

Frequenzbereich: 105-360 kHz

Material: PC+Aluminiumlegierung

Unterstützt: Apple StandBy-Funktion, MagSafe

Protokolle: Magnetic Power Profile (MPP), Extended Power Profile (EPP),

Baseline Power Profile (BPP), Samsung Proprietary Power Delivery Extension (PPDE)

Faltbares kompaktes Design

Integrierter Überhitzungsschutz

Optimiertes 30-W-Netzteil mit 1,5 m USB-C-Kabel im Lieferumfang


UltiMag-Ring für Nicht-MagSafe / Qi2-Geräte enthalten

Hinweis: Für die Aufladefunktion in aufgeklappter Position muss das Smartphone

Qi2- oder MagSafe-fähig sein (diese Information findest du auf der jeweiligen

Herstellersseite des Geräts) oder verwende unseren UltiMag Ring, um diese

Funktion nutzen zu können.

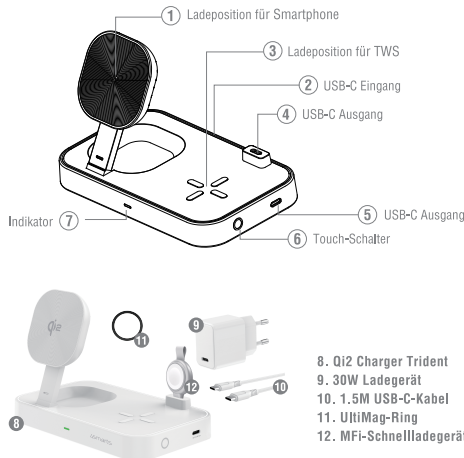

Im Set enthalten: Wenn du den (Trident) im Komplettsset erworben hast, ist das [zusätzliche MFi Apple Watch Schnellladegerät] bereits in der Verpackung enthalten. Folge den Anweisungen in Abschnitt [4], um ihn anzuschließen.

Als optionales Zubehör: Wenn du das [zusätzliche MFi Apple Watch Schnellladegerät] nicht im Set erhalten hast, kannst du es separat als optionales Zubehör erwerben. Folge nach dem Kauf denselben Anweisungen in Abschnitt [4], um es zu verwenden.

3 Erste Schritte

1. Schließe das mitgelieferte USB-C-Kabel des 30-Watt-Ladegeräts an den (mit 2 gekennzeichneten) USB-C-Eingang an eine Stromquelle mit 100-240V an. Nach dem Anschließen leuchtet die blaue LED auf und erlischt automatisch nach 15 Sekunden. Um die LED länger leuchten zu lassen, doppelklicke auf den Touch-Schalter. Wenn die Anzeige erlischt, die Verbindung überprüfen und ggf. erneuern.

2. Stelle dein Gerät mit integrierter drahtloser Ladefunktion in die richtige Position auf das Ladegerät. Der Indikator (mit 7 markiert) leuchtet grün, sobald der Ladevorgang beginnt. Du kannst die LED-Anzeige manuell ein- oder ausschalten, indem du auf den Touch-Schalter (mit 6 gekennzeichnet) klickst.

LED-Indikator

	LED-Ladebereich
Stromversorgung	Leuchtet kurz blau auf
Standby	Aus
Ladevorgang	Leuchtet grün
Ende des Ladevorgangs	Leuchtet grün
Fehlermeldung	Blinkt rot

4 Hinweise zur Funktion

Wie verwende ich meine kabellose Ladestation?

Aufladen deines Wireless Smartphones

1. Lege dein kompatibles Smartphone auf die Ladefläche (mit 1 gekennzeichnet).
2. Das Gerät wird dank der integrierten Magnetrings automatisch angedockt.
3. Sobald es angedockt ist, leuchtet der Indikator (mit 7 gekennzeichnet) für den Ladebereich blau auf und zeigt damit an, dass der Ladevorgang begonnen hat.

Aufladen deines TWS-Headsets

1. Lege dein TWS-Headset auf die Ladefläche (mit 3 gekennzeichnet).
2. Der Indikator (mit 7 gekennzeichnet) für den Ladebereich leuchtet blau und zeigt damit an, dass der Ladevorgang läuft.

Aufladen deiner Smartwatch

1. Schließe dein Smartwatch-Ladegerät an einen der beiden verfügbaren USB-C-Anschlüsse an. (gekennzeichnet als 4 oder 5)

2. Lege deine Smartwatch auf die dafür vorgesehene Halterung.

Hinweis: Die Ladebereiche funktionieren unabhängig voneinander, sodass du deine Geräte je nach Bedarf aufladen kannst.

5 Fehlerbeseitigung

5.1 Mein Gerät lädt nicht über Wireless

- Prüfe, ob das aufgelegte Smartphone kompatibel zum schnellen, kabellosen Aufladen ist. Teste es ggf. auch mit einem anderen Wireless Charger.
- Entferne ggf. die Schutzhülle oder Metallaufkleber von der Rückseite deines Geräts.
- Prüfe, ob ein anderes Gerät, welches kabelloses Aufladen unterstützt, ebenfalls nicht lädt. Somit lässt sich herausfinden, ob ein Defekt oder ein Kompatibilitätsproblem vorliegt.

5.2 Das Aufladen ist zu langsam

Um einen erfolgreichen Ladevorgang zu gewährleisten, stelle sicher, dass der Abstand zwischen dem kabellosen Ladegerät und deinem Endgerät weniger als oder gleich 5 mm beträgt. Wenn die LED-Leuchte rot leuchtet, suche nach Fremdkörpern und entferne diese.

6 Wartung und Pflege

Verwende zur Reinigung nur trockene, weiche Tücher.

7 Gewährleistung

Die 4smarts GmbH übernimmt keinerlei Haftung oder Gewährleistung für Schäden, die aus unsachgemäßer Installation, Montage und unsachgemäßem Gebrauch des Produktes oder einer Nichtbeachtung der Bedienungsanleitung und/oder der Sicherheitshinweise resultieren.

8 Hinweise zum Umweltschutz



Elektrische und elektronische Geräte sowie Batterien dürfen nicht mit dem Hausmüll entsorgt werden. Der Verbraucher ist gesetzlich verpflichtet, elektrische und elektronische Geräte sowie Batterien am Ende ihrer Lebensdauer an den dafür eingerichteten, öffentlichen Sammelstellen oder an die Verkaufsstelle zurückzugeben.

9 Service und Support

Bei defekten Produkten oder Problemen während der Installation wende dich bitte an deinen Händler oder an die 4smarts Produktberatung auf: <http://www.4smarts.com/contact>

Service Hotline

Montag – Freitag: 9 – 17 Uhr

+ 49 (0)821 20708444

E-Mail: customer-service@4smarts.com

10 Konformitätshinweis

Hiermit erklärt die 4smarts GmbH, dass sich dieses Produkt in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 2014/53/EU befindet. Die Konformitätserklärung nach der RED Richtlinie findest du unter www.4smarts.com.

4smarts

Thanks for buying our product! We at 4smarts are sure it will serve you well. Follow us on social media for news, customer support and to win great prizes. See you there!



@4smarts_official



facebook.com/4smarts



linkedin.com/company/4smarts



All listed brands are trademarks of the corresponding companies. Errors and omissions excepted, and subject to technical changes. Our general terms of delivery and payment are applied.